

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
7 October 2004 (07.10.2004)

PCT

(10) International Publication Number  
**WO 2004/085087 A2**

(51) International Patent Classification<sup>7</sup>: **B21B 37/00**,  
38/00

(21) International Application Number:  
PCT/IN2004/000070

(22) International Filing Date: 26 March 2004 (26.03.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
188/KOL/03 28 March 2003 (28.03.2003) IN

(71) Applicant (for all designated States except US): **THE TATA IRON AND STEEL COMPANY LIMITED [IN/IN]; RESEARCH AND DEVELOPMENT AND SCIENTIFIC SERVICES, Jamshedpur 831 001 (IN).**

(72) Inventor: **MUKHOPADHYAY, Ananya; The Tata Iron And Steel Company Limited, Research & Development & Scientific Services, Jamshedpur 831 001 (IN).**

(74) Agents: **DAVAR, G., S. et al.; L.S. Davar & Co., "Monalisa", Flats 1B & 1C, 17 Camac Street, Kolkata 700 017 (IN).**

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **A SYSTEM AND METHOD FOR ON-LINE PROPERTY PREDICTION FOR HOT ROLLED COIL IN A HOT STRIP MILL**

(57) Abstract: This invention provides a system for on-line property prediction for hot rolled coils in a hot strip mill of a steel plant. The system comprises a unit (5) for capturing the chemistry from the steel making stage and providing the data on rolling schedule. Field devices (FD1 ... FDn) are provided at the instrumentation level for measuring process parameters during hot rolling. A programmable logic controller (1) is used for acquiring data of measured parameters from the field devices and feeding the data to a processor (2). Means (3) is provided for conversion of the measured data from time domain To space domain using segment tracking. A computation module (4) processes the converted space domain data for predicting mechanical properties along the length and through the thickness of the strip being rolled. A display unit (6) displays the predicted properties. The data obtained can be stored in a data warehouse (8) for future use. A unit (7) provided in the system can collect the predicted properties and feed the same to the scheduling unit (5).



**WO 2004/085087 A2**

WO 2004/085087

PCT/IN2004/000070

6/p.r.B

## **A SYSTEM AND METHOD FOR ON-LINE PROPERTY PREDICTION FOR HOT ROLLED COIL IN A HOT STRIP MILL**

### **FIELD OF INVENTION**

The present invention relates to a system and method for on-line property prediction for hot rolled coil in a hot strip mill. This invention is in the area encompassing automation research and development, applied to metallurgical processes with specific reference to mechanical property of hot rolled coil.

### **BACKGROUND OF THE INVENTION**

In the hot strip mill the slabs are heated and soaked at an elevated temperature ( $\sim 1200^{\circ}\text{C}$ ) in the reheat furnace, and are subjected to subsequent reduction in the roughing and finishing mill. All reductions are completed in the austenitic phase ( $\sim 890^{\circ}\text{C}$ ) before the strip enters in the run-out table (ROT). The strips are cooled down to  $\sim 600^{\circ}\text{C}$  by using laminar water jets on the ROT, before being coiled in the down coiler.

For determining the mechanical properties of a hot rolled coil from the hot strip mill, in accordance with the criteria mentioned in the technical delivery condition, the usual practice is to perform tensile tests of the specimen in a tensile testing machine, for example, an INSTRON machine. The specimen used for tensile testing is prepared from a cut-

out sample of the outer wrap of the coil produced in the mill. The cut-out sample is then machined to prepare the specimen for tensile testing.

From the stress-strain graph generated from the tensile testing machine, the mechanical properties like Yield Strength (YS), Ultimate Tensile Strengths (UTS) and Percentage Elongation (EL) can be obtained. The test results are posted in the Test Certificate (TC) before the coil is shipped to the customer.

One drawback of this existing method is that there is only one sample per coil that can be tested since the coil cannot be cut from the module for taking the samples.

As there is no means to know the variation in property in the body of the coil, the sample is not representative of the entire coil because the sample from the outer wrap of the coil does not represent the entire length of the coil. Since the variability of properties along the length need to be within control from the point of view of application and further processing, it is important to know this variation during rolling of the hot rolled coil in the hot strip mill so that corrective and preventive action can be taken.

Because of the very nature of the cooling process for the coil, non-uniform cooling takes place along the length of the strip giving very different test results for the cut out from the end of the coil than that likely to be obtained from the body of the coil.

As the results can be obtained only after 2/3 days (time required for cooling from about 600°C to room temperature), no corrective action can be taken during production of the hot rolled strip.

A need therefore exists for developing an on-line system for property prediction of a hot rolled coil.

#### SUMMARY OF THE INVENTION

The main object of the present invention therefore is to provide an on-line system and method of property prediction over the length of hot rolled coil, as the coil is being rolled, to improve the quality and to achieve the stringent property requirements. Such on-line prediction helps the operator to take corrective actions so as to get nearly uniform mechanical properties along the length of the strip.

The system captures the chemistry of the hot rolled coil from the steel making stage and the process parameters during the hot rolling stage. The system then calculates in real time the mechanical properties, likely to be obtained in cold condition after cooling along the length and also across the thickness of the strip being rolled. It also predicts the condition of aluminium nitride after cooling, which in turn gives the forming properties of cold rolled coils after batch annealing.

The system may include parameters for grades of steel such as low carbon steel, grades D (Drawing), DD (Deep Drawing), EDD (Extra Deep Drawing) and steel for cold rolling. The accuracy of the system can be  $\pm 15$  Mpa. The reliability can be as high as 85% .

Thus, the present invention provides a system of on-line property prediction for hot rolled coils in a hot strip mill comprising a unit for providing data on rolling schedule with chemistry from the steel making stage; field devices for measuring process parameters during hot rolling; a programmable logic controller for acquiring data of measured parameters from said field devices and feeding said data to a processor; means for conversion of the measured data from time domain to space domain using segment tracking; a computation module for processing said converted space domain data for predicting mechanical properties along the length and through the thickness of the strip being rolled; and a display unit for on-line display of the predicted properties.

#### BRIEF DESCRIPTION OF THE ACCOMPANYING DRAWINGS

Fig. 1 shows the process flow of the present invention in a hot strip mill.

Fig. 2 shows a schematic diagram of a run-out table of the present invention in a hot strip mill.

Fig. 3 shows a schematic diagram for the system of the present invention,

Fig. 4 shows the system output displayed on a CRT screen

Fig. 5 shows the sub-modules provided in a computation module of the present invention

Fig. 6 shows comparison between predicted data obtained before and after the three days cooling period

#### DETAILED DESCRIPTION

The present invention will now be described in detail with the help of the figures of the drawings.

In Fig. 1 the hot strip mill of the present invention in a steel plant has been depicted where strips are produced from the slab. The slabs of 210 mm thick are heated at an elevated temperature of  $\sim 1200^{\circ}\text{C}$  in the reheat furnace, and are soaked for sufficiently long time so as to obtain fairly uniform temperature all through. The slabs are then rolled in successive passes at the roughing and finishing mill to obtain desired strip thickness. Usually all the deformation is given in the austenitic phase ( $\sim 890^{\circ}\text{C}$ ) before the strip is cooled on the run-out table. The strip is then cooled on the run-out table using laminar water jets to about  $\sim 600^{\circ}\text{C}$  when it coiled in the down-coiler. The run-out table is an important part of the hot strip mill since the entire metallurgical transformation takes place in this region. The austenitic phase is transformed to ferritic stage.

Fig. 2 depicts the schematic of run-out table where the strips, after finish rolling in the austenitic range ( $\sim 890^{\circ}\text{C}$ ), are cooled with water before coiling in the down coiler. The coiling temperature varies between  $580\text{--}700^{\circ}\text{C}$  depending on steel grades produced. During cooling, austenite is transformed to ferrite, pearlite, bainite and martensite depending on the cooling rate. The cooling rate and coiling temperature determines the ferrite grain size, and in turn the mechanical properties. The mechanical properties are determined primarily by ferrite grain size, volume fraction, interlamellar spacing of the pearlite, the size and distribution of precipitates etc., in the cooled strip. The rate of cooling is obtained from the temperature profile. A high rate of heat removal or high temperature gradient through the strip thickness may produce inhomogeneity in through thickness microstructure and also in mechanical properties. Hence the rate of cooling of the hot rolled steel on the run-out table is a determining factor to the final properties.

The run-out table may comprise a total of about eleven water banks for cooling by water from the top and bottom. The first cooling bank is located at a distance of 10 meter from the last finishing stand. Out of eleven banks, the first ten are macro-cooling banks and the last one is micro-cooling bank. There is a small difference in cooling efficiency of top and bottom cooling.

Fig. 3 shows a schematic diagram of the system. The data flows from the instrumentation and field devices level (level 0) upwards. These field devices FD1 to FDn obtain real time process related data such as pyrometers, tachometers, solenoid valves etc. From a unit in level 3 represented by reference numeral 5 in Fig. 3, the data on rolling schedule with chemistry from the steel making stage are fed to a computation module 4 for processing.

The captured data from the field devices FD1 to FDn are moved upwards of level 1 comprising mill control system. The data comprising measurement parameters from the field devices FD1 to FDn are acquired by a programmable logic controller 1 and fed to a processor 2 in level 2 (process control system) for processing. The programmable logic controller 1 like a PLC 26 made by Westinghouse is connected to the field devices through coaxial cable using remote I/O. For capturing data every 0.01 sec, a WESTNET I Data highway with Daisy Chain Network topology can be used.

The data transfer between the programmable logic controller 1 and the processor 2 can be done through WESTNET II using coaxial cable with Token Pass Network topology. Processor 2 can be an Alstom VXI 186.

The time domain data from processor 2 are converted to a space domain data through segmentation, with the help of means 3 for conversion of



data provided in the system. The output from means 3 comprising finish rolling temperature (FRT), lower cooling temperature (CT), rolling speed, cooling condition for a given position on the strip are provided as input to a computation module 4.

The segment tracking carried out by means 3 for conversion of data will now be explained.

The on-line data regarding the finish rolling temperature (FRT), speed of the strip and the signal of the valve status (opening/closing), the actual cooling temperature (CT) are obtained from the processor 2. The cooling of strip on run-out table (ROT) is a dynamic process. The objective of finish rolling is to roll the entire length of the strip in the austenitic range. To attain this temperature, the operator needs to change the speed of rolling. On the other hand, the objective of cooling is to maintain a constant cooling rate and a constant cooling temperature (CT). This means with the increase in speed, the more number of headers are required to be made on and with decrease in speed the more number of headers are to be made off. Thus, a steady state cooling is activated.

Therefore, the process data that is collected every second during the whole cooling process (~ 1.5-2 min) shows variation of speed and variation of number of header opening. This is the time domain data. To

make it space domain to obtain the finish rolling temperature (FRT), the amount of water required cooling the strip i.e. the number of header opening, sequencing of header pattern, the total strip length on run-out table is divided into some segments and each segment is tracked to obtain the process history. This process of conversion is called segment tracking and this segmental file with records converted from time to space domain is fed as an input to on-line model.

The system predicts coiling temperature over the entire length of the coil. It also shows the average value of coiling temperature for the coil. The actual values of the coiling temperature are also shown for comparison. An accurate match ensures that the cooling rate calculated from the model at any point over the length is accurate enough the purpose of prediction of ferrite grain size.

Ferrite grain size ( $d\alpha$ ) variation over the length of the coils is shown along with its average and tail end value. The latter can easily be verified through metallographic analysis from the specimen taken from the outer wrap of the coil produced in hot strip mill.

Hot rolled coil used for cold-rolled applications are processed through cold-rolling mill. For aluminium-killed drawing quality steel it is important to have aluminium and nitrogen in complete solid solution in the hot rolled coil after coiling for better formability of cold rolled coil. The

formation of aluminium nitride precipitate before batch annealing is detrimental and its formation is avoided by choosing higher finish rolling temperature (FRT) followed by lower coiling temperature (CT). Aluminium nitride precipitate is desirable in batch annealing stage where recrystallization is guided by aluminium nitride precipitates, thereby achieves high  $r$ -bar (plastic strain ratio) and  $n$  (work hardening exponent).

The system predicts the amount of aluminium and nitrogen in solid solution over the length of the coil. This prior information to cold rolling mill (CRM) helps take corrective actions in further processing.

The system predicts variation of yield strength, ultimate tensile strength and % elongation over the entire length of the coil, along with its average and tail end value. The latter is verified with the actual value obtained from mechanical testing of the specimen prepared from the outer wrap of the coil.

The system predicts ferrite grain size, aluminium and nitrogen in solution, yield strength, ultimate tensile strength and % elongation not only along the length but also through the thickness at three different locations – center, surface and quarter thickness.

The tolerance limits specified by the customers in the Technical Delivery Conditions (TDC) are also shown on the display screen.

As shown in Fig. 5, the computation module 4 comprises five sub-modules, namely, deformation sub-module 41, thermal sub-module 42, microstructural sub-module 43, precipitation sub-module 44 and structure property correlation sub-module 45.

Deformation sub-module 41 determines final austenite grain size finish rolling.

The final austenite grain size depends on strain (reduction per pass), strain rate (speed of deformation), and temperature of deformation, inter-pass time etc.

Thermal sub-module 42 determines temperature drop during radiation in air and cooling in water at run-out table. It calculates the cooling rate, which determines the recrystallisation behaviour and the phase transformation.

Microstructural sub-module 43 determines the microstructural changes during phase transformation.

For low carbon aluminium killed steel used for further cold rolling and annealing, the amount of aluminium and nitrogen in solid solution in hot rolling stage plays a vital role in formability properties of cold rolled sheet.

Precipitation sub-module 44 determines the amount of aluminium and nitrogen in the solid solution and also as precipitates after coiling.

The structure-property correlation sub-module 45 calculates the yield strength (YS), ultimate tensile strength (UTS) and percentage elongation (EL) based on the phases present.

The output of the system gives cooling rate, volume fraction of aluminium nitride, and the mechanical properties (YS, UTS, EL) over the length and through the thickness of the coil. These are displayed on a display unit 6 for every coil at various positions of the strip as shown in Fig. 4. The predicted coiling temperature is also shown vis-a-vis the actual in order to ensure that the predicted cooling rate (CR) to achieve the CT as obtained from the thermal sub-module is accurate enough. Apart from these, the average values over the length are also calculated. The properties of the tail-end of the coil (outer wrap) is also displayed since this can directly be verified from the tensile testing results of the specimen taken from the coil.

The predicted data outputted from the computation module 4 on the mechanical property along the length and through the thickness of the strip being rolled are stored in a unit 7 for use by the scheduling unit 5 at production planning and scheduling level.

The data for each coil so generated are stored in the system and, are sent to the data warehouse 8 where they are stored for future use.

Fig. 6 shows a comparison between the predicted data on yield strength (YS), ultimate tensile strength (UTS) and percentage elongation (EL) obtained before and after the cooling period of three days.

**WE CLAIM:**

1. A system of on-line property prediction for hot rolled coils in a hot strip mill comprising :
  - a unit (5) for providing data on rolling schedule with chemistry from the steel making stage;
  - field devices (FD1...FDn) for measuring process parameters during hot rolling;
  - a programmable logic controller (1) for acquiring data of measured parameters from said field devices (FD1...FDn) and feeding said data parameters to a processor (2);
  - means (3) for conversion of the measured data from time domain to space domain using segment tracking;
  - a computation module (4) for processing said converted space domain data for predicting mechanical properties along the length and through the thickness of the strip being rolled; and
  - a display unit (6) for on-line display of the predicted properties.
2. The system as claimed in claim 1, wherein said field devices FD1 ... FDn comprises a pyrometer, a speedometer, a thickness gauge, a solenoid valve etc. for measuring data on process parameters.

3. The system as claimed in claims 1 and 2, wherein said programmable logic controller (1) is a Westinghouse PLC 26 connected to said field devices FD1.. FDn through coaxial cable using remote I/O.
4. The system as claimed in claim 3, wherein said programmable logic controller (1) is configured to capture data from said field devices FD1 .. FDn over 0.01 sec. Using WESTNET I data highway with Daisy Chain Network topology.
5. The system as claimed in the preceding claims, wherein said processor (2) is an ALSTOM VXI 186 processor and the data transfer between said processor (2) and said programmable logic controller (1) is through WESTNET II using coaxial cable with Token Pass Network topology.
6. The system as claimed in the preceding claims, wherein said computation module (4) is provided with a deformation sub-module (4) for determining final austenite grain size after finish rolling.
7. The system as claimed in claim 6, wherein said computation module (4) further comprises a thermal sub-module (42) for determining the temperature drop during radiation while cooling said hot rolled strip.
8. The system as claimed in claim 7, wherein said computation module (4) further comprises a microstructural sub-module (43) for determining the microstructural changes during phase transformation.



9. The system as claimed in claim 8, wherein said computation module (4) further comprises a precipitation sub-module (44) for determining the amount of aluminium nitrogen in the solid solution and in the precipitates after cooling.
10. The system as claimed in claim 9, wherein said computation module (4) is further provided with a structural property correlation sub-module (45) for calculating the yield strength (YS), ultimate tensile strength (UTS) and percentage elongation (EL) based on the phases present.
11. The system as claimed in the preceding claims, wherein said display unit (6) is for displaying a cooling temperature, ferrite grain size, yield strength, ultimate tensile strength, percentage elongation and nitrogen in solid solution/precipitate.
12. The system as claimed in claim 1, wherein said predicted data on mechanical properties along the length and through the thickness of the strip being rolled, outputted from said computation module (4) can be stored in a unit (7) for use by said scheduling unit (5) at production planning and scheduling level.
13. The system as claimed in the preceding claims, wherein a data warehousing device (8) is provided for storing the data generated by said computation module (4).

14. A system of on-line property prediction for hot rolled coil in a hot strip mill substantially as herein described and illustrated.

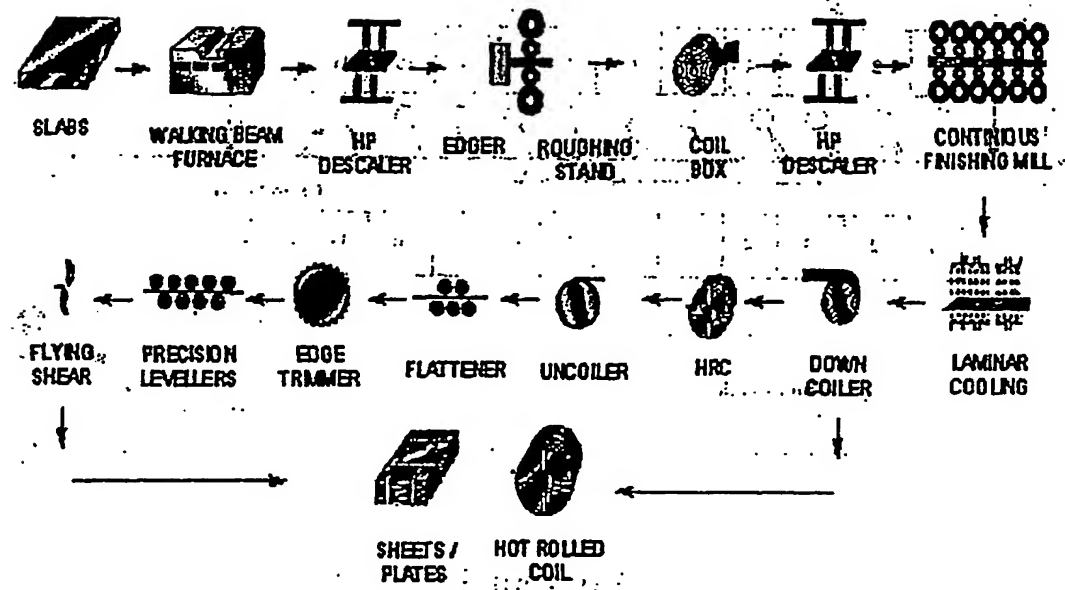


Fig. 1

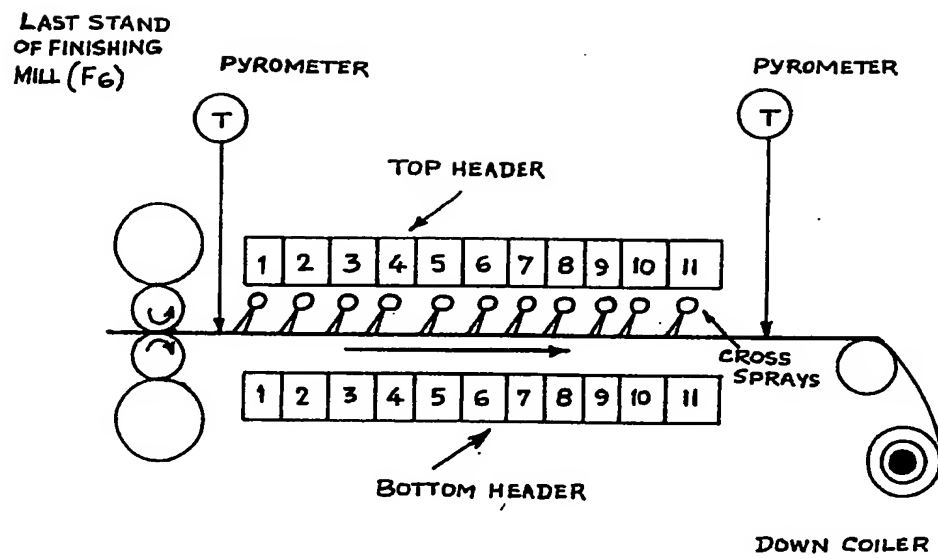


Fig. 2

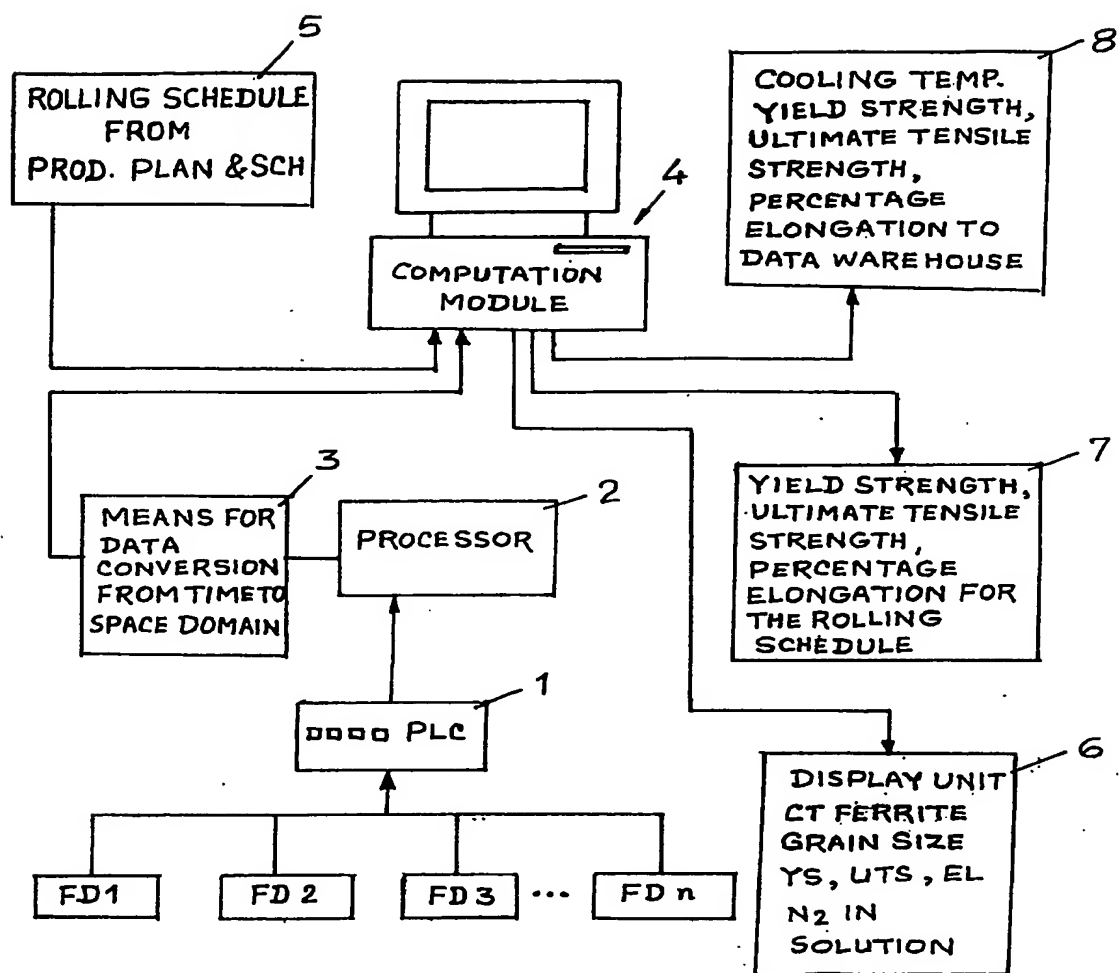


Fig. 3

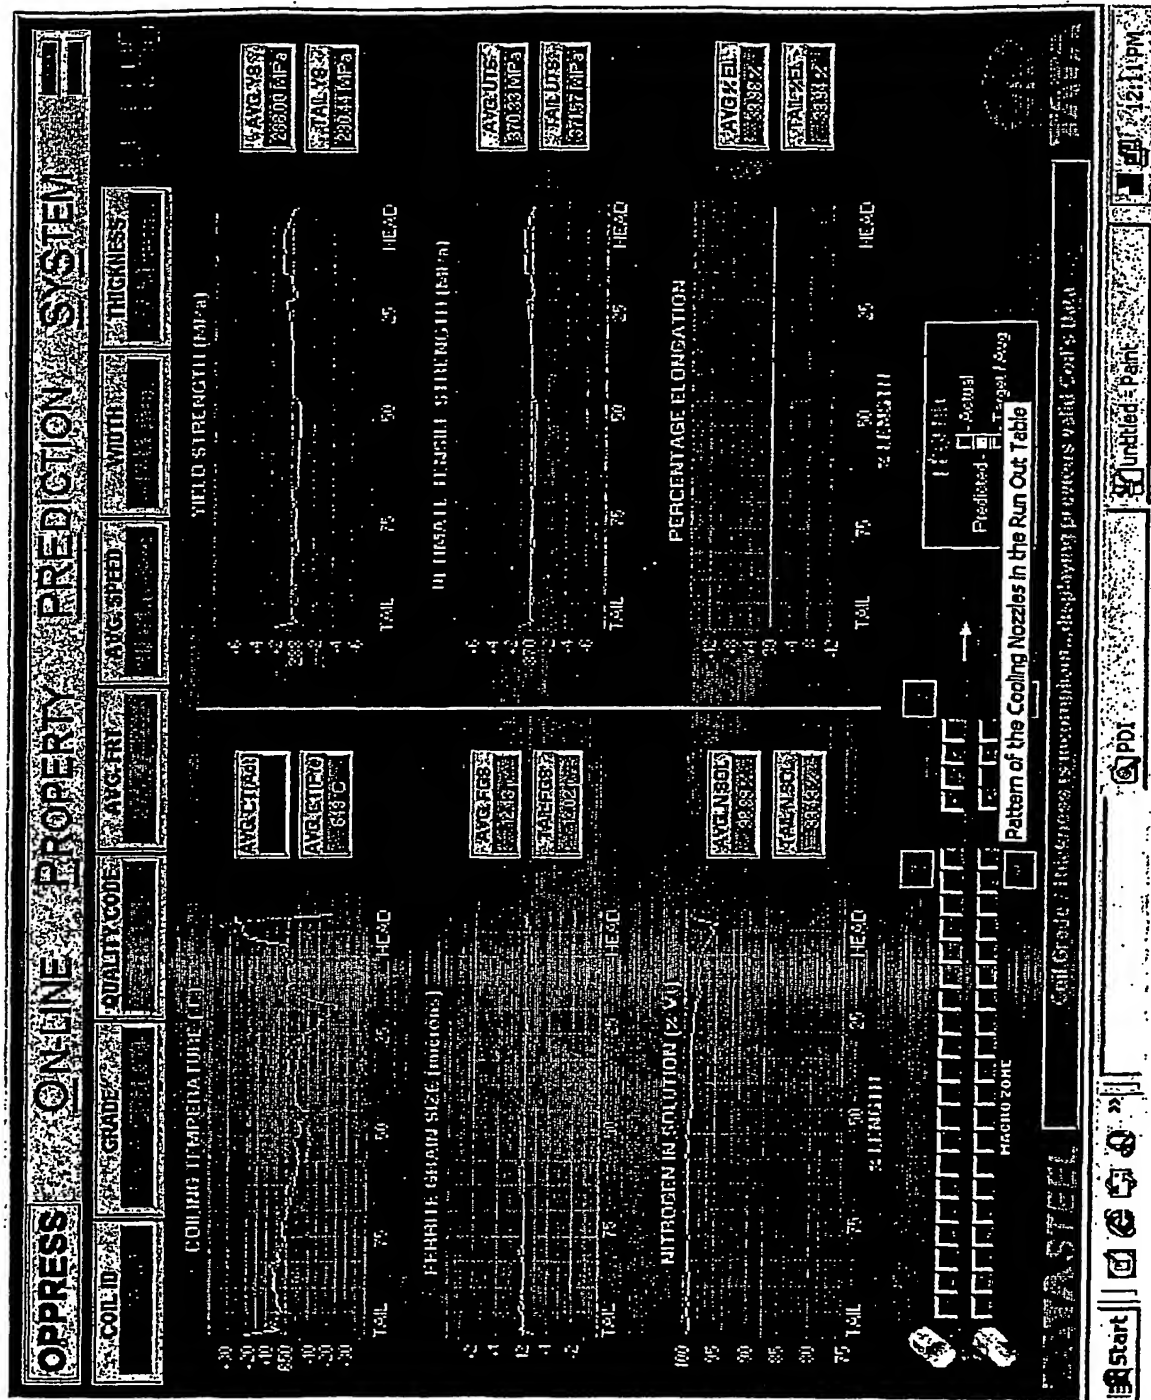


Fig. 4

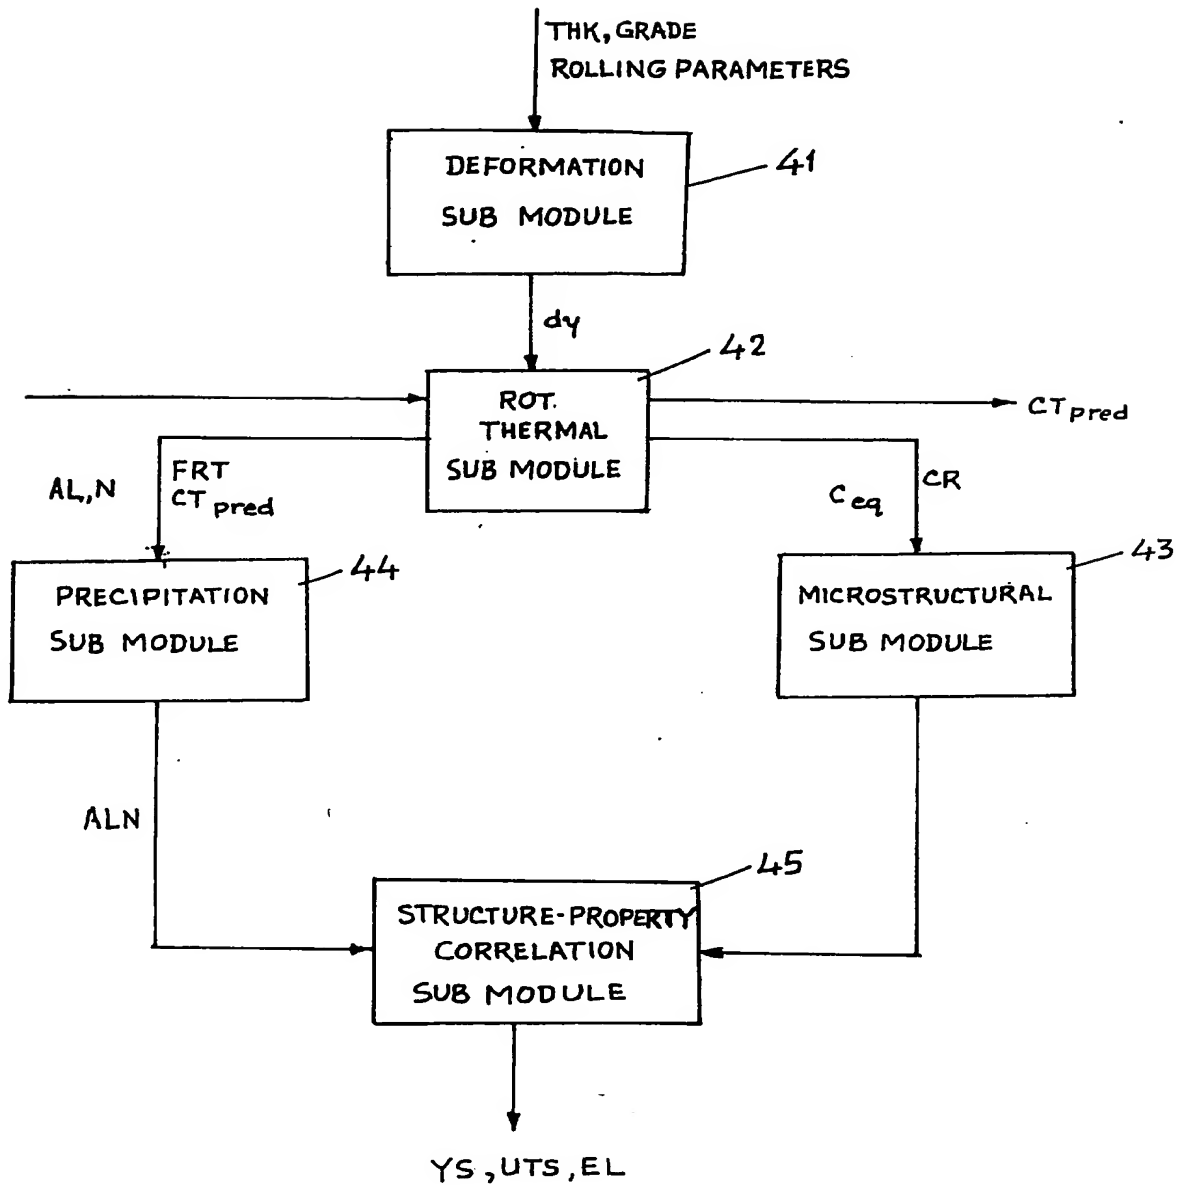


Fig. 5

## Data Compare Between 09/10/2003 And 12/10/2003

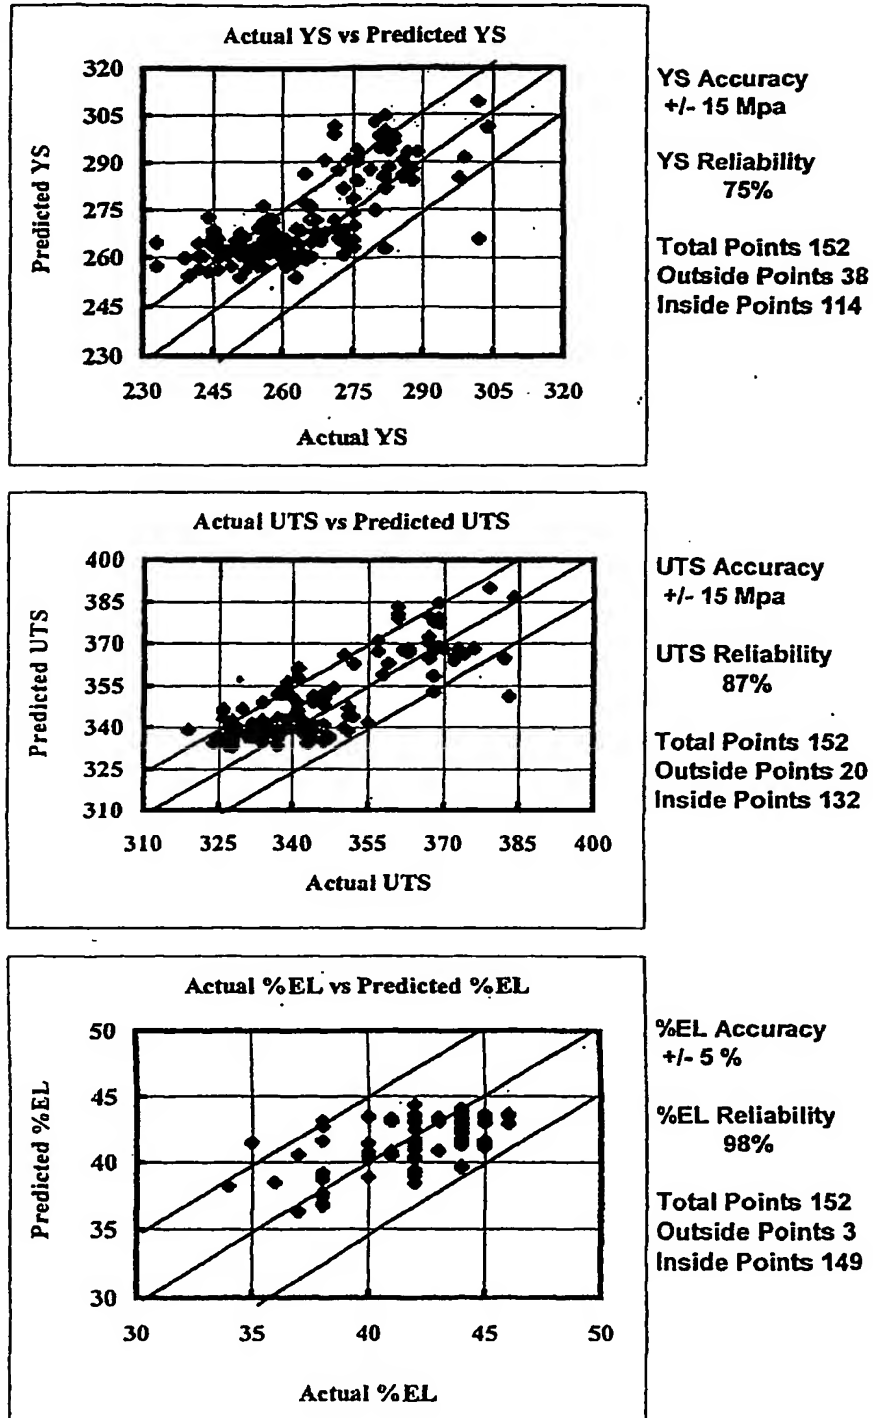


Fig.6



## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/IN 2004/000070

<b>A. CLASSIFICATION OF SUBJECT MATTER</b> IPC <sup>7</sup> : B21B 37/00, B21B 38/00 According to International Patent Classification (IPC) or to both national classification and IPC		
<b>B. FIELDS SEARCHED</b> Minimum documentation searched (classification system followed by classification symbols) IPC <sup>7</sup> : B21B 37/00, B21B 38/00 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Electronic data base consulted during the International search (name of data base and, where practicable, search terms used) epodoc, fi cl txt, fi cl txtg		
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 3253438 A (STRINGER) 31 May 1966 (31.05.1966) <i>figs. 1, 3, 4, 8, 10, 11.</i>	1, 2, 7
Y	DE 19941600 A1 (SIEMENS AG) 15 March 2001 (15.03.2001) <i>the whole document.</i>	1, 2, 7
A	US 3568637 A (SMITH) 9 March 1971 (09.03.1971) <i>abstract, fig. 1.</i>	1, 2
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 27 July 2004 (27.07.2004)		Date of mailing of the international search report 6 September 2004 (06.09.2004)
Name and mailing address of the ISA/ AT Austrian Patent Office Dresdner Straße 87, A-1200 Vienna Facsimile No. +43 / 1 / 534 24 / 535		Authorized officer BABUREK G. Telephone No. +43 / 1 / 534 24 / 352

# INTERNATIONAL SEARCH REPORT

PCT/IN 2004/000070

Patent document cited in search report			Publication date	Patent family member(s)			Publication date
DE	A	19941600	2001-03-15			none	
US	A	3253438	1966-05-31	FR	A	1447915	1966-08-05
				FR	A	1381347	1964-12-14
				GB	A	982232	1965-02-03
				GB	A	982231	1965-02-03
				US	A	3248916	1966-05-03

**AMENDED CLAIMS**

[received by the International Bureau on 29 October 2004 (29.10.04);  
original claims 1, 12 replaced by amended claim 1; original claim 14 cancelled;  
original claim 13 renumbered as claim 12; remaining claims unchanged (3 pages)]

1. A system for on-line display of property prediction for hot rolled coils in a hot strip mill comprising:
  - a unit (5) for providing data on rolling schedule with chemistry from the steel making stage;
  - 5 - field devices (FD1...FDn) for measuring process parameters during hot rolling;
  - a programmable logic controller (1) for acquiring data of measured parameters from said field devices (FD1...FDn) and feeding said data parameters to a processor (2);
  - 10 - means (3) for conversion of the measured data from time domain to space domain using segment tracking; and
  - a computation module (4) for processing said converted space domain data for predicting mechanical properties along the length and through the thickness of the strip being rolled;
  - 15 wherein, said predicted data on mechanical properties outputted from said computation module (4) being stored in a unit (7) for use by said scheduling unit (5) at production planning and scheduling level.
2. The system as claimed in claim 1, wherein said field devices (FD1...FDn) comprise a pyrometer, a speedometer, a thickness gauge, a solenoid valve  
20 etc. for measuring data on process parameters.

3. The system as claimed in claim 1, wherein said programmable logic controller (1) is a Westinghouse PLC 26 connected to said field devices (FD1...FDn) through coaxial cable using remote I/O.
4. The system as claimed in claim 2, wherein said programmable logic controller (1) is configured to capture data from said field devices (FD1...FDn) over 0.01 sec. using WESTNET I data highway with Daisy Chain Network topology.
5. The system as claimed in the preceding claims, wherein said processor (2) is an ALSTOM VXI 186 processor and the data transfer between said processor (2) and said programmable logic controller (1) is through WESTNET II using coaxial cable with Token Pass Network topology.
6. The system as claimed in the preceding claims, wherein said computation module (4) is provided with a deformation sub-module (41) for determining final austenite grain size after finish rolling.
7. The system as claimed in claim 1, wherein said computation module (4) further comprises a thermal sub-module (42) for determining the temperature drop during radiation while cooling said hot rolled strip.

8. The system as claimed in claim 1, wherein said computation module (4) further comprises a microstructural sub-module (43) for determining the microstructural changes during phase transformation.
- 5 9. The system as claimed in claim 1, wherein said computation module (4) further comprises a precipitation sub-module (44) for determining the amount of aluminium nitrogen in the solid solution and in the precipitates after cooling.
- 10 10. The system as claimed in claim 1, wherein said computation module (4) is further provided with a structural property correlation sub-module (45) for calculating the yield strength (YS), ultimate tensile strength (UTS) and percentage elongation (EL) based on the phases present.
- 15 11. The system as claimed in the preceding claims, wherein a display unit (6) is provided for displaying a cooling temperature, ferrite grain size, yield strength, ultimate tensile strength, percentage elongation and nitrogen in solid solution/precipitate.
12. The system as claimed in the preceding claims, wherein a data warehousing device (8) is provided for storing the data generated by said computation module (4).